
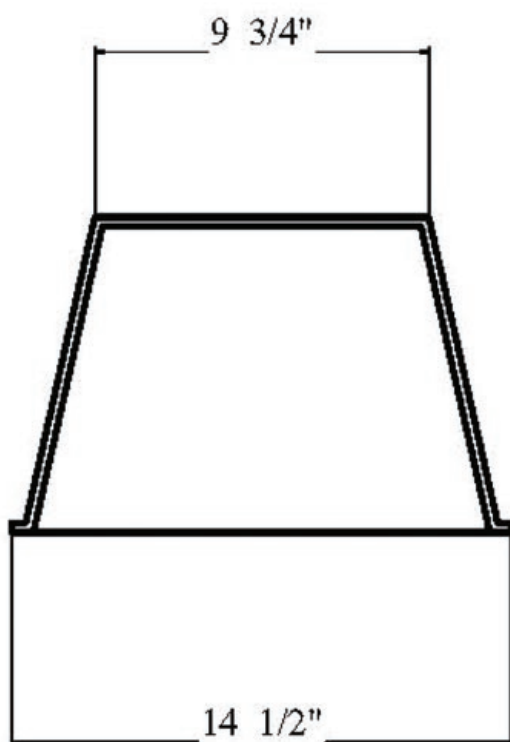


## MODEL TC-130 Recessed Light Cover

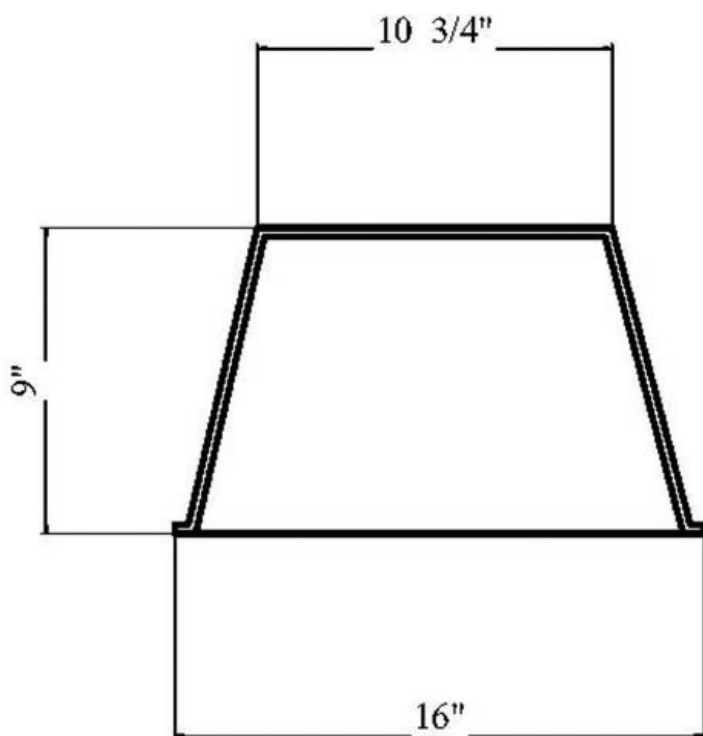

Model Number	Outside Height	Outside Length	Outside Width
TC130	9"	16"	14 1/2"
Performance Data			
<b>For Use:</b> <ul style="list-style-type: none"> <li>Prevents insulation from coming in contact with recessed light fixtures.</li> <li>Can be used in conjunction with wide range of recessed lights.</li> <li>Compatible with sprayed foam insulation, low density foam, blown-in insulation and lay-in insulation.</li> <li>Suitable for attic spaces, ceiling spaces, insulated ceilings, and drop ceilings.</li> <li>Fire tested in accordance with IEC 60598-1.</li> </ul>			
General Information			
<b>Benefits:</b> <ul style="list-style-type: none"> <li>Fire Resistant.</li> <li>Energy Saving.</li> <li>Reduces draft problems.</li> <li>Prevents heat loss through the fixture.</li> <li>Reduces airflow from the outside.</li> <li>Added Flange for improved draftstopping capabilities.</li> <li>Enhances the acoustic protection of the ceiling.</li> <li>Prevents insects and other small animals from entering through the light.</li> <li>Lightweight (approx. 1 lbs.).</li> <li>Easy to fit without special tools.</li> <li>Thermally tested according to UL 1598 for usage with IC and Non-IC rated lights.</li> <li>Maintenance free.</li> </ul>			
Manufactured By			
<b>Commercial Thermal Solutions, Inc.</b> 6 Worthington Avenue Spring Lake, New Jersey 07762  <b>Sales and Technical Support:</b> Toll Free: 800.664.0063 • Fax: 877.415.1185  • International Phone: (001) 1 + 732.927.2090 • International Fax: (001) 1 + 732.927.2091			